

**DLT-V8315**  
**Celeron®**



**Fully Configurable 15" Industrial PC, Rugged**

- Intel® Celeron® 2980U Dual Core CPU
- Color-TFT 15"
- Fully configurable to support individual needs
- Break-proven, abrasion-resistant touchscreen, IK08
- Integrated uninterruptible power supply (UPS)
- Extreme temperature range, cold store capable
- Fully rugged, IP66 for the complete system


**Specification**

System	CPU Mass storage memory	Intel® Celeron 2980U Dual Core 1,6 GHz with 4 GB, or 8 GB RAM 4 GB to 128 GB CFast
Housing		Completely sealed, fanless design Coated aluminium
Dimensions/Weight (without antenna)		Width x height x depth: 390 mm x 313 mm x 98 mm (15.35 in x 12.32 in x 3.86 in) Weight 6.2 kg
Display		Color-TFT 15.1" XGA 1024 x 768 400 cd/m²
Touchscreen		Highest impact capable, abrasion resistant touchscreens in 2 variants
Front Keys		5 or 26 keys for resistive, for choicefront keys or 26 front keys, optional 9 keys for PCT
Software	Operating system Emulations (third-party)	MS® Win 10 IoT Enterprise, WE8S, WE 8.1 Ind Pro, WES 7, Win7 Pro, Linux VT100, VT220, IBM 5250, TN 3270, Citrix Client®, Freefloat Access One
Communication	Wi-Fi LAN WPAN	Wi-Fi IEEE 802.11 a/b/g/n, optional Ethernet 10/100/1000 MBit/s, optional 2 <sup>nd</sup> Ethernet Bluetooth, optional
Interfaces	Serial USB	2 x RS-232, alternatively 1 x RS-232 and RS-422/485 4 x USB 2.0 (HI-SPEED™), bootable; including 1 x Service USB
Audio/Voice	Sound Kit	Speaker integrated Advantech-DLoG specific Voice Kit, optional
Power supply (internal)	DC variant AC variant	12/24/48VDC nominal voltages Automatic switch-on/switch-off function via vehicle ignition Integrated Uninterruptible Power Supply (UPS), typically 10 min, optional 110/230 VAC, 50/60 Hz
Environmental	IP protection class Impact resistance of the front Operating temperature Shock/Vibration	IP66 for the complete system IK08 according to IEC 62262 -30 to +50 °C (-22 to +122 °F) Class 5M2 according to EN 60721-3-5
Approvals	Certifications	US Highway Truck as MIL-STD 810F CE Immunity Class A, Emission Class B / FCC Class B, CCC China, MIC Japan


Datasheet V1.00 © by DLoG GmbH 07/2016. Information is subject to change. Product names are in most cases also registered trademarks and are thus subject to law.

# DLT-V8315 Celeron®



## Dimensions (in mm)

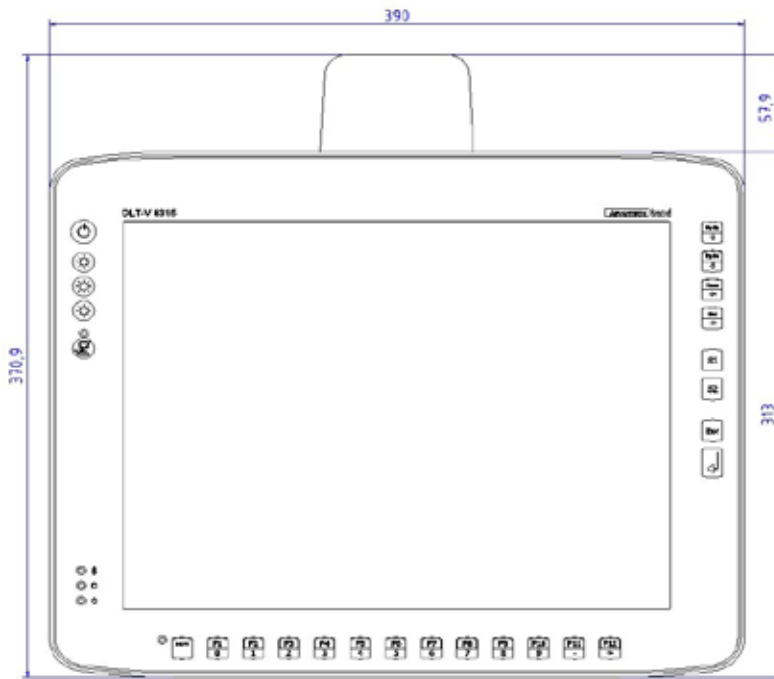


DLT-V8315 model example

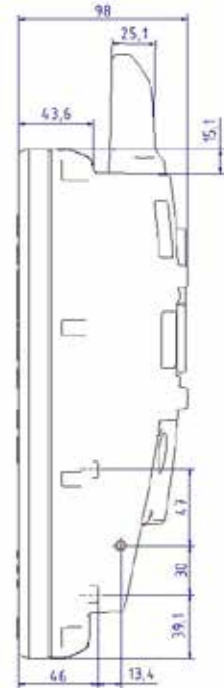

## Connectors DC and AC Devices

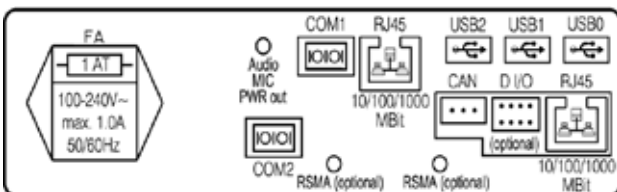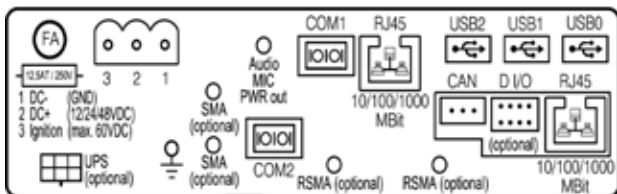

## Mounting Variants (Selection)

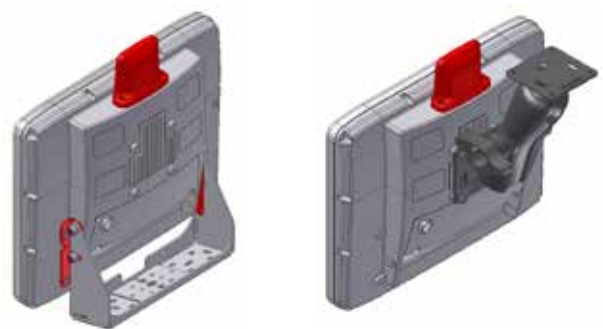

## Advantech-DLoG Partner Contact

## Accessories/Options

- Scanners and scanner mountings
- Keyboards and keyboard mountings
- Terminal mountings (wide range of mounting brackets, RAM solutions etc.)
- USB Stick, USB Recovery Stick
- External CD/DVD ROM drive